


## Downloading the Flash 512.Bin File and loading it to the Ocelot and Leopard.

### Downloading the Flash 512.Bin File to your computers Hard Disk Drive.


Click the link marked Flash512.bin file. A File Download window will appear.

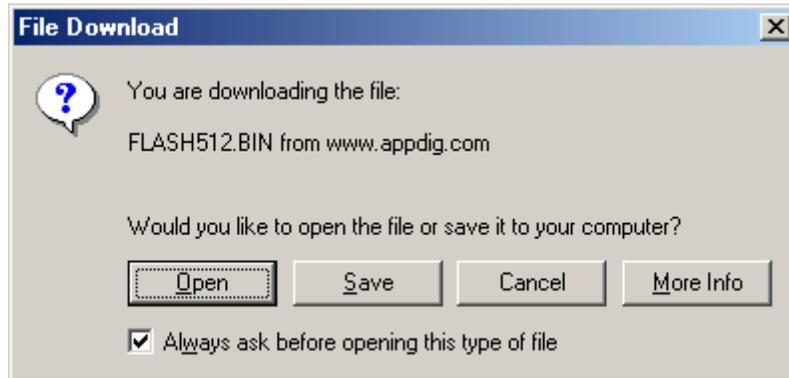

Click Save.

Click the right Down arrow to the right of Save In.

Find the Program Files\ADI\ADICON2500 folder. If you originally installed C-Max in a different directory then find the directory where the CPUXA.exe file exists.

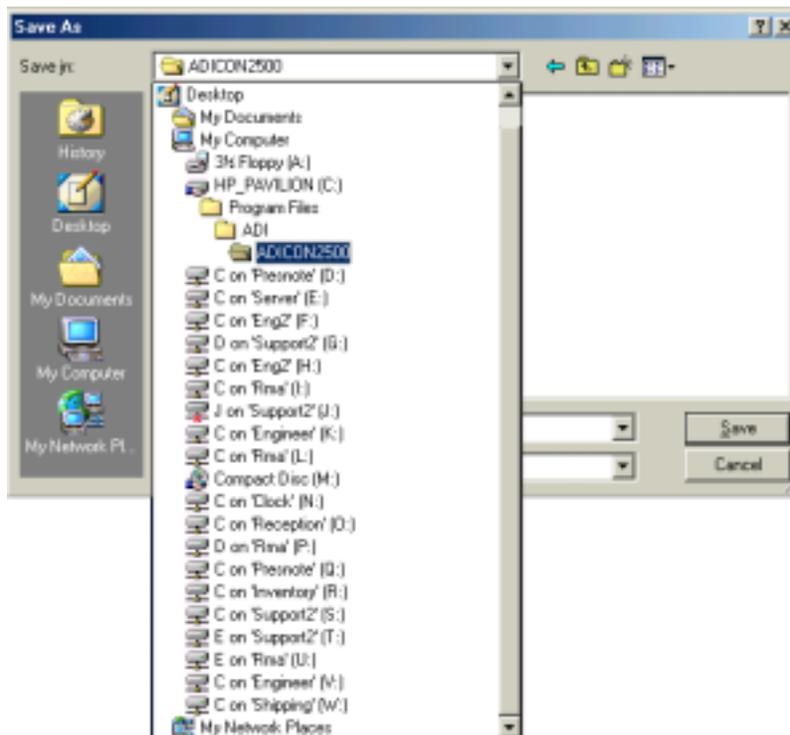


Click Save. The Flash512.Bin will be saved to the Hard Disk Drive.

## Loading the Flash512.bin file into the Ocelot or Leopard.


Run C-Max. Click Comms, Attach to CPUXA. The CPUXA Access screen will appear.



Click CPUXA Utilities, Reload CPUXA Executive.

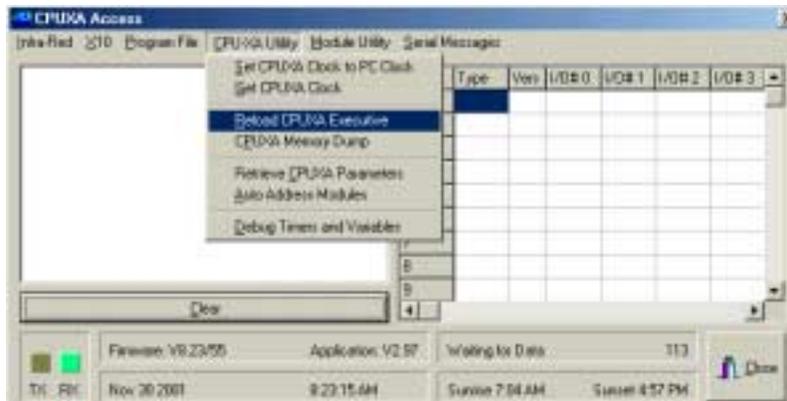

A Blue bar will scroll across the bottom of the CPUXA Access screen.

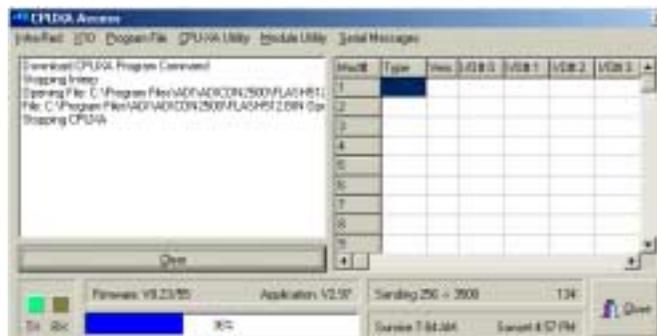

When this is complete, ver 3.00 will be loaded into the Ocelot or Leopard. A CPUXA window reading “Be sure to re-load your Program File” will appear. You will then need to reload your C-Max program into the Ocelot or Leopard.

